

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106


1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client : Riverhill Floors Pty Ltd 29 Commerce Circuit Yatala QLD 4207

Test Number	:	21-006060
Issue Date	:	17/12/2021
Print Date	:	17/12/2021

Sample Description	Clients Ref : "Riverhill iDesign Herringbone Timber Flooring" Engineered timber flooring
	Colour : Various End Use : flooring
	Nominal Composition : 4mm Oak Veneer adhered to a multi layered plywood
	Nominal Mass per Unit Area/Density : 1000g/m2 Nominal Thickness : 15mm

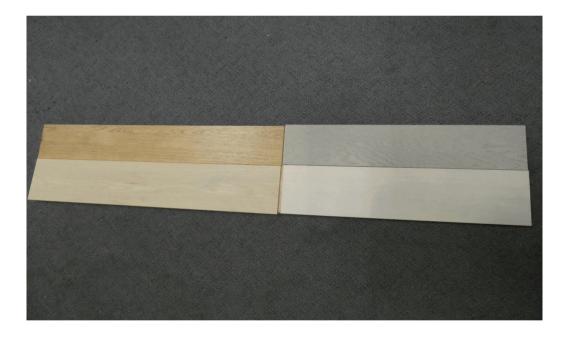

257649

55705

C Australian Wool Testing Authority Ltd Copyright - All Rights Reserved Accredited for compliance with ISO/IEC 17025 - Testing

Samples and their ident



Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

ald.

Fiona McDonald APPROVED SIGNATORY Page 1 of 2







Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client :	Riverhill Floors Pty Ltd	Test Number	:	21-006060
	29 Commerce Circuit	Issue Date	:	17/12/2021
	Yatala QLD 4207	Print Date	:	17/12/2021

AS 4586-2013 Appendix A

Slip Resistance Classification of new Pedestrian Surface Materials Wet Pendulum Test Method Date of Testing

Date of Testing					16/12/202 ²			
Test Temperature (20±5degC)					22	2 °C		
Sample Preparation	Washed w	Washed with pH neutral detergent and dried.						
Test Direction	Length							
Fixed/Unfixed					Unfixed	ł		
Slider No 96 Batch No					07	,		
Length	1	2	3	4	5	SRV		
British Pendulum	39	39	40	40	40	40		
Number Classification					P	3		

Equipment: Cooper Pendulum Skid Tester Serial No: 1433-01 Calibrated 21/09/2021 Slider prepared using P400 and 3µm lapping film.

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance and wear on their slip resistance be checked.

257649

55705

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

12

Fiona McDonald APPROVED SIGNATORY





MICHAEL A. JACKSON B.Sc.(Hons)

C