

Wooden-Land Timber Veneer

Classic Engineered Floors



*Enjoy the Beautiful &
Natural Finish of
Floating Timber Floors*



TOPDECK FLOORING

Wooden-Land Timber Veneer Classic Engineered Floors

Floating timber floors are also known as timber veneer floors or engineered timber floors.


Floating floors are the cost effective alternative to solid timber floors. Floating timber flooring range: 3-6 mm thick pre-finished timber veneer.

- Quick & easy to install
- No staining or sticky finishes means less mess in your home
- Pre-finished coat, no sanding or lacquering required


5G Licensed Lock System




■ Dimensions: 1820-2200mm long X 136mm wide X 3/14mm thick OR 1820-2200mm long X 180mm wide X 3/14mm thick

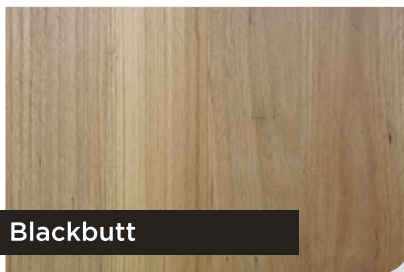


Blackbutt

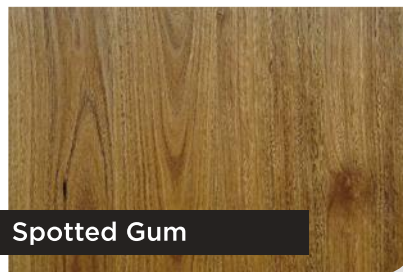


Spotted Gum

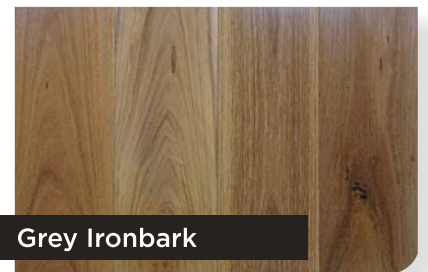

Grey Ironbark

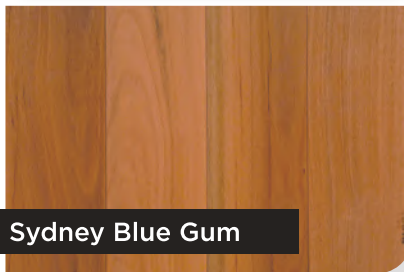

Sydney Blue Gum

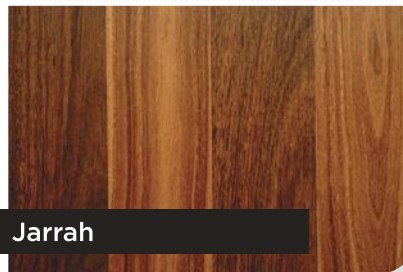

Jarrah




Tasi Oak


Tongue & Groove System



■ Dimensions: 1820mm long X 122mm wide X 3/14mm thick

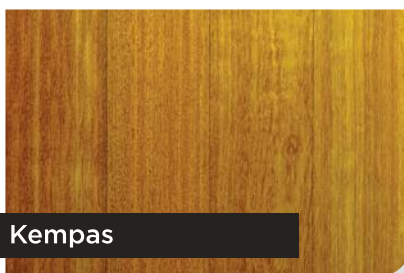

Kempas

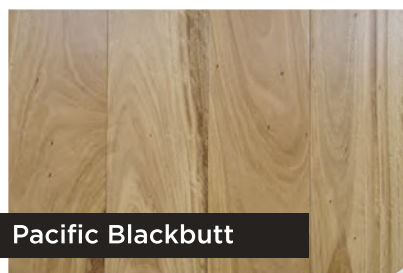

Pacific Blackbutt



Pacific Spotted Gum

Proud to be a Member of the

atfa
Australian timber flooring association

WOODEN-LAND TIMBER VENEER CLASSIC ENGINEERED FLOORS TECHNICAL SPECIFICATIONS



quick and easy
installation

easy
maintenance

TYPE

Engineered Flooring, 3mm Timber Veneer on
11mm Plywood

GRADE & MANUFACTURING PROCESS

AB Grade
Contains Tight and Filled Knots and Natural
Characteristics

COLOR COLLECTIONS

Blackbutt, Spotted Gum, Grey Ironbark,
Sydney Blue Gum, Jarrah, Tasi Oak,
Kempas, Pacific Blackbutt, Pacific Spotted Gum

LOCKING SYSTEM

5G Licensed Click Lock System
Tongue & Groove System

COATING FINISH

9 Layers of Treffert Matt Lacquered Finish

FIRE RATING

CHF (Critical Heat Flux & Critical Radiant Flux)
3.8kw/m²

SLIP RATING

Slip Resistance Value (SRV): 28 (P2) as per Slip
Resistance AS 4586 (2013)

ENVIRONMENTAL & QUALITY CERTIFICATES

VOC E1
ISO9000 Quality Control System and ISO14000
Environment Control System

STRUCTURAL WARRANTY

25 Years Residential; 5 Years Commercial

COATING WARRANTY

5 Years Residential; 3 Years Commercial

Combining quality & environmental control standards throughout the manufacturing process.



As timber is a natural product, the colour, grain and feature patterns will vary in the flooring as in the printed media.
For detail maintenance & installation guidelines please refer to the website.





Quality is our Attitude



TOPDECK FLOORING

www.topdeckflooring.com.au

Importer & Supplier of Quality Floor Boards

16 Salisbury Street, Silverwater, NSW 2128 Australia

Phone: 02-9748 2288 | Fax: 02-9748 2266

Email: info@topdeckflooring.com.au